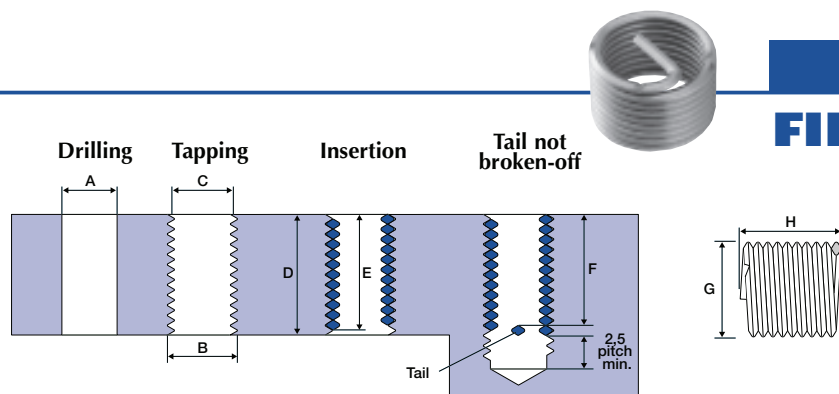



FILTEC®+
METRIC

Ø x pitch	x d	D : base tapping length	CODE 127 : Filtec+ 125 : Green Filtec+ 104 : Lockfil+	H : nb. of turns at the initial state Tolerance -0,25	G : Ø initial state min - max	A : Drilling		Tapping	
						Ø drill	Tolerance min max	B : Ø ext. min	C : Ø outer
M 2 x 0,40	1 d	2,00	127 02 40 02 00	2,90	2,60 2,75	2,10	2,090 + 0,090	2,520	2,260 + 0,053
	1,5 d	3,00	127 02 40 03 00	4,90					
	2 d	4,00	127 02 40 04 00	6,90					
	2,5 d	5,00	127 02 40 05 00	8,90					
	3 d	6,00	127 02 40 06 00	10,90					
M 2,5 x 0,45	1 d	2,50	127 02 45 25 00	3,60	3,15 3,30	2,60	2,597 + 0,100	3,084	2,792 + 0,055
	1,25 d	3,12	127 02 45 31 20	4,75					
	1,5 d	3,75	127 02 45 37 50	6,00					
	2 d	5,00	127 02 45 50 00	8,20					
	2,5 d	6,25	127 02 45 62 50	10,60					
M 3 x 0,50	1 d	3,00	127 03 50 03 00	3,95	3,70 3,90	3,20	3,108 + 0,112	3,650	3,325 + 0,059
	1,25 d	3,75	127 03 50 03 70	4,95					
	1,5 d	4,50	127 03 50 04 50	6,35					
	2 d	6,00	127 03 50 06 00	8,80					
	2,5 d	7,50	127 03 50 07 50	11,25					
M 3,5 x 0,60	1 d	3,50	127 04 60 35 00	3,90	4,35 4,45	3,70	3,630 + 0,125	4,280	3,890 + 0,069
	1,5 d	5,25	127 04 60 52 50	6,60					
	2 d	7,00	127 04 60 70 00	9,15					
	2,5 d	8,75	127 04 60 87 50	11,80					
	3 d	10,50	127 04 60 90 50	14,00					
M 4 x 0,70	1 d	4,00	127 04 70 04 00	3,80	5,00 5,15	4,20	4,152 + 0,140	4,910	4,455 + 0,074
	1,25 d	5,00	127 04 70 05 00	5,05					
	1,5 d	6,00	127 04 70 06 00	6,25					
	2 d	8,00	127 04 70 08 00	8,65					
	2,5 d	10,00	127 04 70 10 00	11,20					
M 5 x 0,80	1 d	5,00	127 05 80 05 00	4,45	6,10 6,30	5,20	5,174 + 0,160	6,040	5,520 + 0,077
	1,25 d	6,25	127 05 80 06 20	5,70					
	1,5 d	7,50	127 05 80 07 50	7,15					
	2 d	10,00	127 05 80 10 00	10,10					
	2,5 d	12,50	127 05 80 12 50	12,80					
M 6 x 1,00	1 d	6,00	127 06 01 06 00	4,30	7,40 7,65	6,30	6,217 + 0,190	7,300	6,650 + 0,092
	1,25 d	7,50	127 06 01 07 50	5,55					
	1,5 d	9,00	127 06 01 09 00	7,10					
	2 d	12,00	127 06 01 12 00	9,85					
	2,5 d	15,00	127 06 01 15 00	12,60					
	3 d	18,00	127 06 01 18 00	15,00					